

SMARTFLOW®

MOLD PROTECTIVE SWITCHES

Smartflow® Mold Protective Limit Switches are designed and built by engineers with expert mold-building experience. Thinswitch®, SmartLock® and Versaswitch™ are the benchmark switches in the injection molding industry. Molders rely on them to provide dependable position indication and protection for valuable injection molds.

Thinswitch for ejector plate return

- ◆ Standard Temperature
- ◆ High Temperature
- ◆ Liquid-Resistant
- ◆ Global (3mm, 4mm or 3/16" height) for use with European or US Standard Molds

SmartLock Slide Retainer and Limit Switch for slide retention and position verification

- ◆ Standard Temperature
- ◆ High Temperature
- ◆ Locking Plunger

Versaswitch for core pull applications

- ◆ Optional Mounting Bracket



SMARTLOCK®
U.S. Patent No. 6,126,429




THINSWITCH®
U.S. Patent No. 5,446,252



VERSASWITCH™



GLOBAL THINSWITCH®
U.S. Patent No. 7,569,783



LIQUID-RESISTANT THINSWITCH®
U.S. Patent No. 6,982,392



Design and specifications are subject to change without notice.

GLOBAL THINSWITCH® Liquid-Resistant 3mm, 4mm, 3/16" Height

General Description

Smartflow Global Thinswitch Limit Switch helps prevent accidental closure in injection molds by verifying ejector plate return in injection molds with 3mm, 4mm or 3/16" rest buttons, and where occasional water or oil spray is present. A polyurethane dome covers the actuator spring, protecting internal gold switch contacts from environmental contamination.

A special mounting bracket aids installation from the edge of the mold. The bracket allows molders to slide the Thinswitch into place without disassembling the mold or using screws to hold the switch in place. Spacers placed under the switch accommodate different rest button heights.

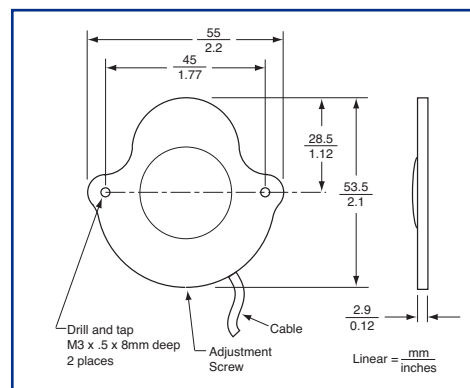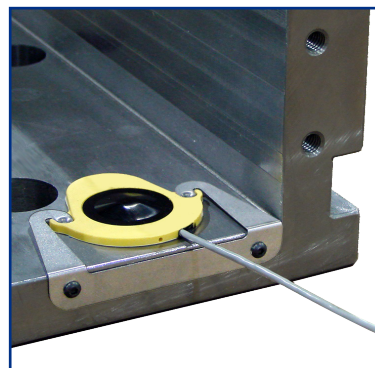

Part Number

TW-222-LR

CE EN 60947-5-1
IP 41

Specifications

Operating Temperature 80°C (176°F) max.
Switching SPST (normally open)
Contacts BeCu with Hard Gold Plating

Rated Current (Resistive) at 24VDC vs. Operating Temperature		
mAmps	°C	°F
100	29.4	85
90	49.0	120
80	68.3	155
70	79.4	175

Materials

BodyFiberglass-Reinforced Nylon
DomePolyurethane
Back CoverPolyester film
Mounting Bracket..... Stainless Steel
Wire Leads28ga stranded
2-conductor, shielded cable
2m long, ends stripped and tinned

burger & brown
engineering, inc.

4500 E 142nd Street
Grandview, MO 64030 USA
Tel: 816-878-6675
www.smartflow-usa.com


SMARTFLOW Limit Switches are designed for use in very low power mold protection control circuits. They are not intended to switch heavy loads in power applications.

THIN SWITCH® LIMIT SWITCH

General Description

Smartflow ThinSwitch Limit Switch verifies ejector plate return in plastics injection molds. This small switch is thin enough to fit inside the ejector housing. It can also be used for core slides, or places where space is limited. Choose from the original design or the liquid-resistant housing for areas where water or oil spray is present.

The Thinswitch Limit Switch has been tested for reliability over 10 million cycles without failure. Two switches can be used in series for larger molds.



Part Numbers

Original Thinswitch

T-222 175°F (79.4°C) max.

HT-291 250°F (121°C) max.

Liquid-Resistant Thinswitch (IP41)

T-222-LR 175°F (79.4°C) max.

HT-291-LR..... 250°F (121°C) max.

Specifications

Electrical

250VAC5 Amps Resistive

4 Amps Inductive

28VDC (sea level)5 Amps Resistive

4 Amps Inductive

See chart below for temperature effects on maximum current rating

Rated Current vs. Steel Temperature					
T-222			HT-291		
Amps	°F	°C	Amps	°F	°C
5.0	85	29.4	5.0	100	37.7
4.0	120	49.0	4.5	155	68.3
3.0	155	68.3	4.0	210	98.8
2.0	175	79.4	3.5	250	121.1

SwitchingSPDT

Materials

Body Fiberglass-Reinforced Nylon

Spring Stainless Steel

Back Cover.....Polyester Film

Wire Leads22ga stranded


3-conductor, shielded cable

6ft. (1.8m) long


ends stripped and tinned



T-222 & HT-291 Dimensions

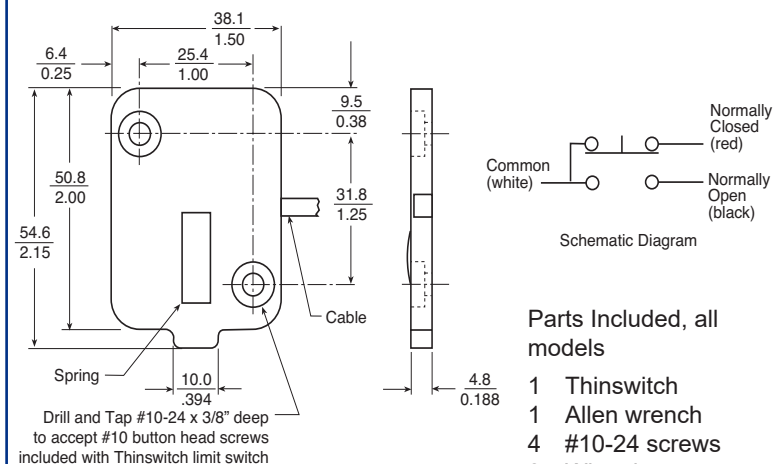

T-222-LR & HT-291-LR Dimensions

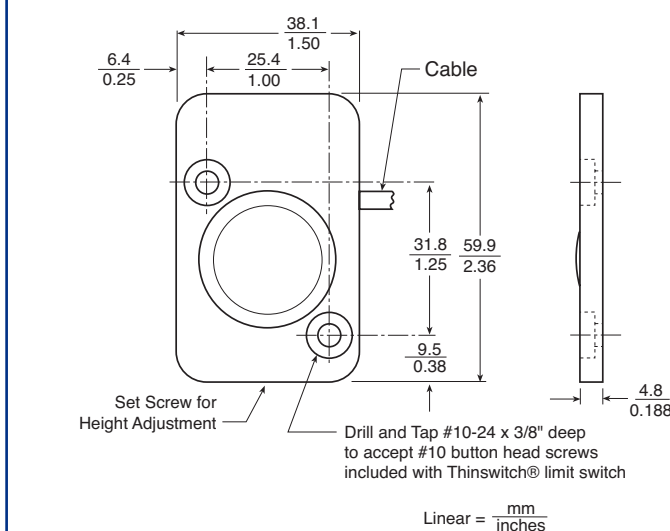



Switch Body	Fiberglass-Reinforced Nylon
Locking Plate	Hardened Steel
Locking Plunger	Hardened Steel
Wire Leads	22ga stranded
	3-conductor, shielded cable
	6ft. (1.8m) long
	ends stripped and tinned





VERSASWITCH™ LIMIT SWITCH

General Description

Smartflow Versaswitch Limit Switch installs into an injection mold to indicate location of the core, preventing tool damage.

Versaswitch is easily installed into a 5/8"-24 female thread. The switch actuates when 3.5 lbs of force is applied to the plunger. Actuation height is adjusted by threading the switch to the correct position in the installation. The switch is held in place via a lock-washer and hex nut. SPDT snap action switch provides a simple, positive indication of the mold or core location.

Optional mounting bracket is available to aid installation. Threaded fastener holes facilitate mounting the switch in many positions. The bracket is made from corrosion-resistant anodized aluminum.

Part Numbers

V-222	Versaswitch
	includes lock-washer and nut
VB-222	Mounting Bracket
	red anodized aluminum

Switch Specifications


Electrical	240VAC
	5 Amps Resistive
	3 Amps Inductive
Operating Temperature	180°F max. (82°C max.)
Switching	SPDT
Operating Force	3.5 lbs (1.6 kg)
Pre-travel to operating point	0.06" (1.5mm)
Over-travel	0.01" (.25mm)
Enclosure	Watertight per IP68S

Switch Materials

Body	Anodized Aluminum/Epoxy
Plunger	Stainless Steel
Nut	Anodized Aluminum
Lock-washer	Zinc-Plated Steel
Wire Leads	22ga stranded 3-conductor, shielded cable 6ft. (1.8m) long ends stripped and tinned




**V-222
Versaswitch**

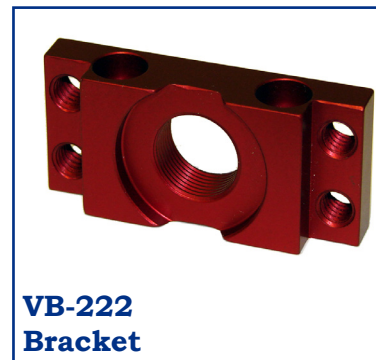

**VB-222
Bracket**

V-222 Switch Dimensions

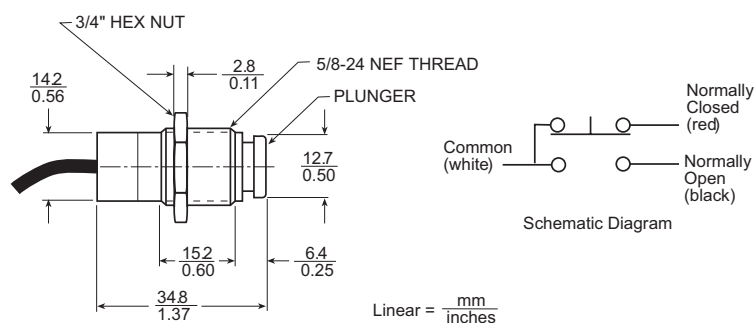

VB-222 Bracket Dimensions

